


NOTE: The front side bearing fixing is ensured after the mounting of the pump. The other bearing is free.



| CODE              | V  | kW  | RPM  | Rate     | Rot  | IP   | Curve |
|-------------------|----|-----|------|----------|------|------|-------|
| MH125 3.0/35 1203 | 12 | 3.0 | 3500 | S2-6min  | CWDE | IP20 | fig.3 |
| MH125 3.0/35 2403 | 24 | 3,0 | 3500 | S2-10min | CWDE | IP20 | fig.4 |

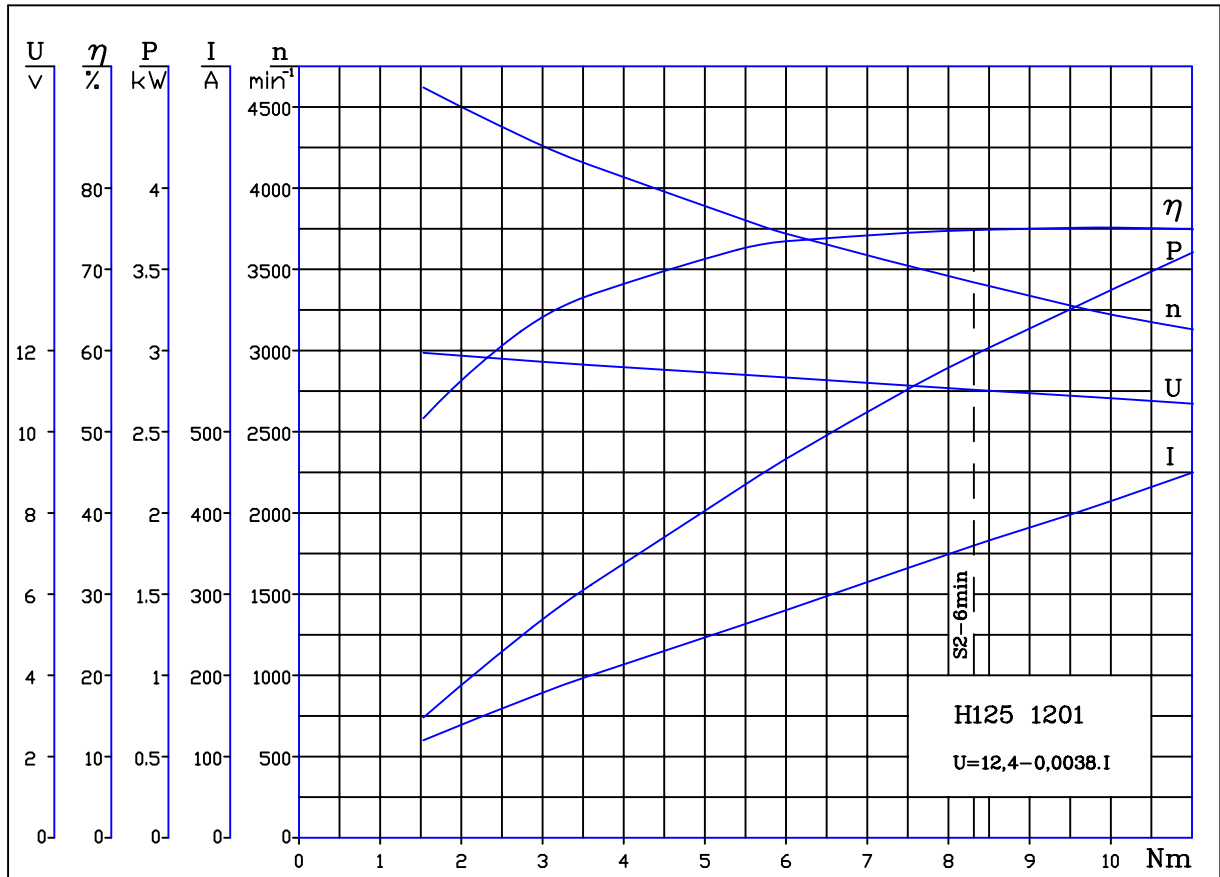


fig.3

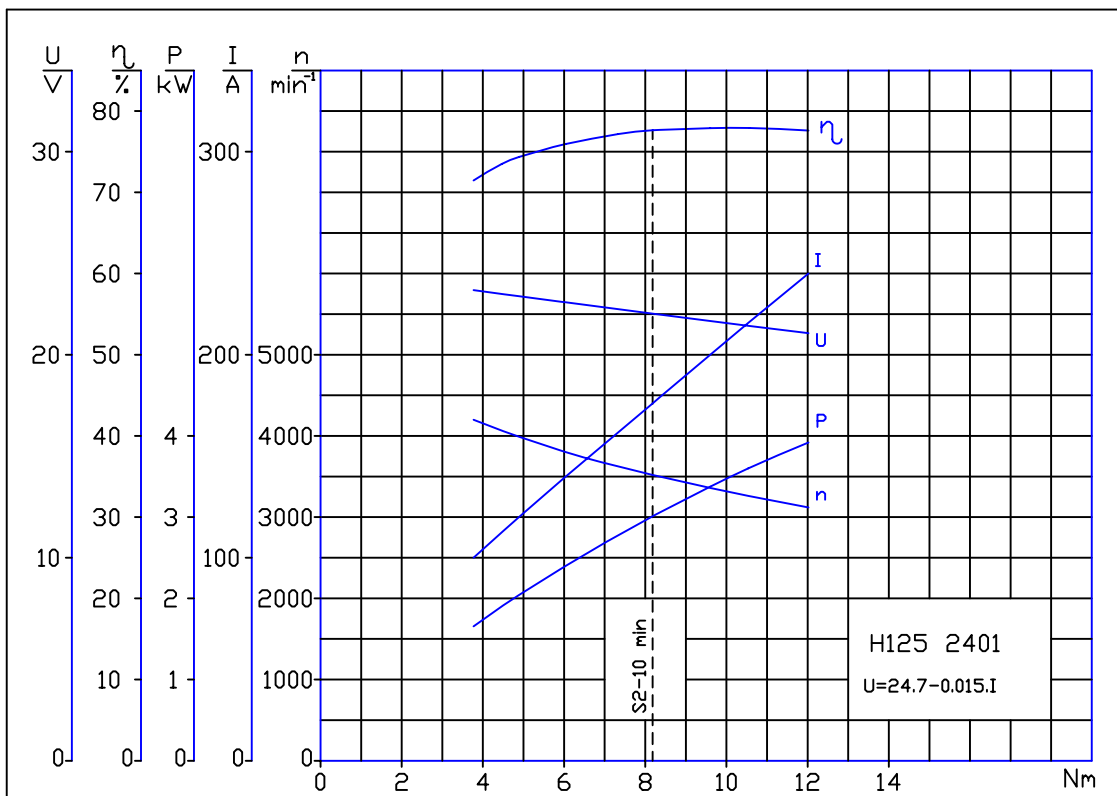


fig.4